


THERMO WIRE

THERMOLEITUNG

**Fe-CuNi type JX 2x0.22 mm² (DIN IEC 60584-3, cl. 2) - teflon
part number: 1334003 THL**

Fe-CuNi Typ JX 2x0,22 mm² (DIN IEC 60584-3, Kl. 2) - Teflon
Artikelnummer: 1334003 THL

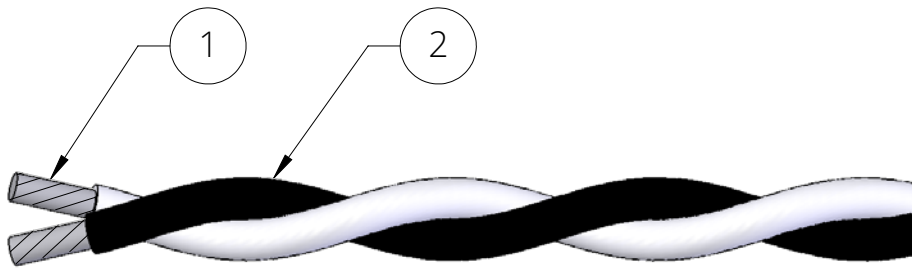

Electric characteristics Elektrische Eigenschaften

Operating temperature of insulation: - 25 °C to + 200 °C
Betriebstemperatur der Isolation: - 25 °C bis + 200 °C

Test voltage: effective 500 V
Prüfspannung: effektiv 500 V

Structure Aufbau

- ① **Thermo wire: Fe-CuNi, type JX (DIN IEC 60584-3, cl. 2), 2x0.22 mm² (7x0.20 mm)**
Thermoleitung: Fe-CuNi, Typ JX (DIN IEC 60584-3, Kl. 2), 2x0,22 mm² (7x0,20 mm)
- ② **Core insulation, Fp-PTFE-open stranding, colours black (+) and white (-), Ø of wire 2.4 ±0.2 mm**
Aderisolation, Fp-PTFE-offene Verseilung, Farbe schwarz (+) und weiß (-), Ø des Leiters 2,4 ±0,2 mm